



SPECIFICATIONS



ARTICLE

Designation : **AlphaTec® 88356 latex glove**

Code bobet :

26687 : S.7 blue

26688 : S.8 blue

26689 : S.9 blue

26690 : S.10 blue

Selling Unit : **pair**

Non-contractual pictures



CHARACTERISTICS



Unlined blue gloves for the food and chemical industries, with specially treated latex to reduce the risk of allergies

- Material: Treated natural rubber latex (Reduced risk of allergic reactions)
- Color: Blue
- Length: 305 / 12 mm
- Ultra-thin 0.43 mm palm: ensures durability despite its thinness
- Industrial sectors: Food processing, cleaning and maintenance, production, agriculture, etc.
- Applications: All food processing applications involving food contact, handling chemicals, fruit and vegetable processing, cleaning and maintenance, etc.



PERFORMANCES :

- Allergen reduction: They benefit from a special chlorination process, which reduces the risk of allergic reactions
- Increased tactility and sensitivity: At 0.43 mm thick, these AlphaTec® gloves remain thin yet durable, with high levels of tactility, sensitivity, and dexterity
- Improved grip: The lightweight AlphaTec® 88-356 gloves also feature a fishscale texture, ensuring excellent grip for both wet and dry handling
- Specialized protection: They also offer EN 374 Type B chemical protection, ideal for low-risk applications, such as detergent cleaning, as well as oily and mildly acidic food processing

PACKAGING :

12 pairs per bag; 12 bags per carton

STANDARDS :

Complies with the Order of August 5, 2020, relating to rubber materials and articles in contact with foodstuffs, food products, and beverages.

Complies with EU Regulation 2016/425 relating to personal protective equipment (category III). Complies with European standards:


- General requirements: EN ISO 21420:2020
- Chemical risk: EN ISO 374-1:2016 type B KPT
- Mechanical risk: EN 388:2016 +A1:2018 X010X
- Microorganism: EN ISO 374-5:2016

Complies with the following provisions:

- Regulation (EC) 1935/2004 and Regulation (EC) 2023/2006 relating to good manufacturing practices (GMP) for materials and articles intended to come into contact with foodstuffs



0493



EN388:2016
X010X



EN ISO 374-5
VIRUS



EN ISO374-1:2016
TYPE B KPT

AlphaTec® 88-356

FICHE D'INFORMATION SUR LA DURABILITÉ DES PRODUITS



ANSELL EARTH

Ansell Earth représente nos produits qui offrent des avantages environnementaux tout au long de leur cycle de vie.

Production

Fabriqué dans une usine :

- fonctionnant à 54% d'énergie renouvelable
- recyclant min. 20% d'eau pour réduire l'utilisation d'eau douce
- certifiée par Intertek pour avoir détourné >99% des déchets de la décharge
- With accredited Environmental and Energy Management Systems



Conditionnement

- Recyclable
- La boîte en carton contient min. 80% de matériaux recyclés
- Taille des cartons optimisée pour une expédition efficace


Production



Fabriqué dans une usine :

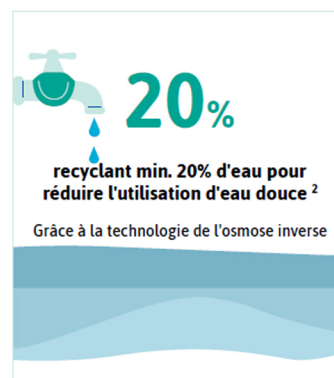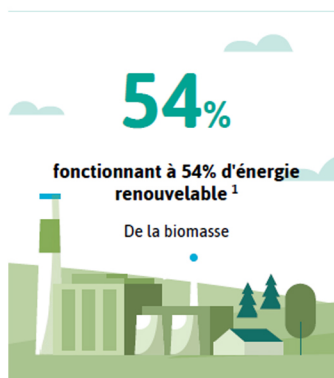

Conditionnement

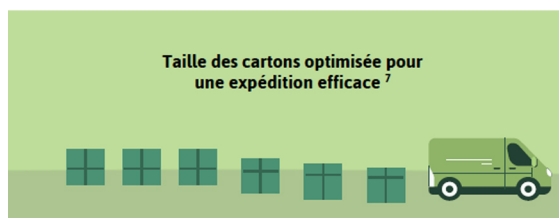

CARACTERISTIQUES ENVIRONNEMENTALES

Gant latex AlphaTec® 88356

Codes BOBET : 26690, 26689, 26688, 26687

Les impacts environnementaux de ce produit ont été analysés le long de son cycle de vie.




MATIERES PREMIERES

- La boîte en carton contient minimum 80% de matériaux recyclés

FABRICATION



- Usine fonctionnant à 54% d'énergie renouvelable
- Usine recyclant minimum 20% d'eau pour réduire l'utilisation d'eau douce
- Usine certifiée par Intertek pour avoir détourné plus de 99% des déchets de la décharge
- Usine certifiée ISO 14001 et ISO 50001



EXPEDITION

- Taille des cartons optimisée pour une expédition efficace