

SPECIFICATIONS



A WATTS Brand

ARTICLE**Designation :** Hygienicpro floor drain D.300, bottom discharge**Code bobet :** 23233**Selling Unit :** Unit



Non-contractual pictures

**CHARACTERISTICS**

ROUND FLOOR DRAIN, DIAMETER 300 MM, BOTTOM DISCHARGE


- In stainless steel AISI 304 (EN 1.4301)
 - For concrete, resin, tiled floors
 - Water guard : 50 mm
 - Flow rate : 4 l/s
 - Load class : R50, 5 tons
-
- Applications : industries, maximum hygiene zone
 - Includes : 1 floor drain D.300 mm 755.503.110, 1 trap 562.102.000S (code Bobet 23240) and 1 flake grating circle 790.273.000.60

DESCRIPTION :**Height :** 378 mm**Output diameter :** 110 mm**Exit :** Vertical (bottom)

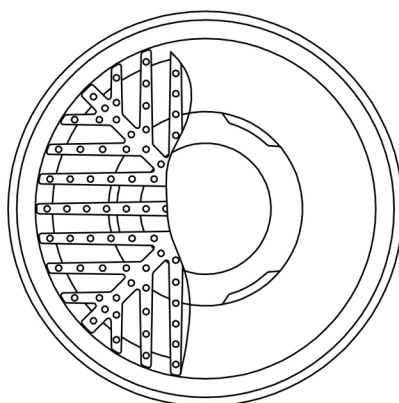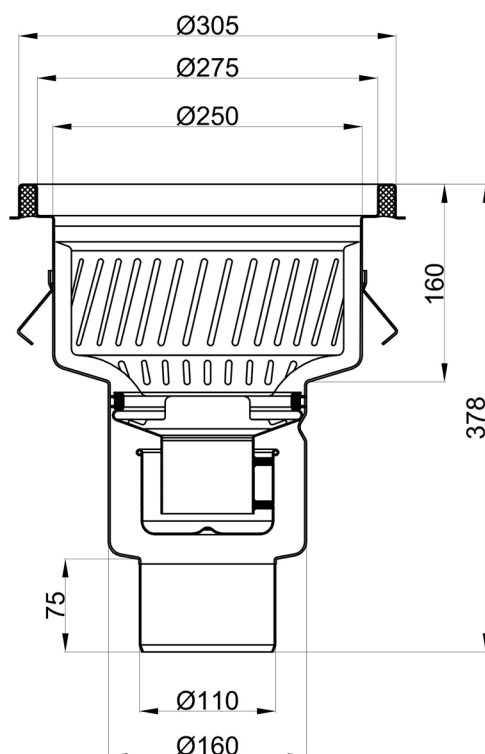

ATTENTION
Veuillez vérifier attentivement ce dessin.
Annulation ou modification impossible après
approbation. Merci de votre confiance.

BON POUR ACCORD
(Date et signature)

		Contrôle:	Client:		Affaire:		Matière: NFEN 1.4301 AISI 304	
Ech:	Qté:	Accord client:	Garde d'eau conforme EN 1253-1		Panier 78000402005 en option		Date	Dessin N°
Auto	☐		Désignation:		SIPHON 755.503.110		24/06/15	10090_15
 BLÜCHER France ÉCOULEMENTS INOX NE PAS UTILISER, REPRODUIRE OU COMMUNIQUER SANS AUTORISATION			Tél. 01.60.86.30.15 fax. 01.60.86.06.13					