



SPECIFICATIONS



ARTICLE

Designation : **HYFLEX® 11840 glove**

Code bobet :

23707 : S7

23708 : S8

23709 : S9

23710 : S10

Selling Unit : **pair**

Non-contractual pictures



CHARACTERISTICS



Ansell Earth

- Specifications : Black supported nitrile protective gloves. Coated palm, nitrile foam, seamless knitted. Spandex nylon liner, knitwrist.
- Length : 200-275 mm
- Gauge : 15
- Nitrile foam coating with a 1.1 thickness (patent pending) offering a level 4 of abrasion resistance
- Coating up to 20% more breathable than the previous formulations which keeps hands cool and dry - The knitted support provides a second skin effect and follows the hand natural contours for more comfort : It provides a perfect adjustment on the little finger (for a better comfort) and on the fingertips and on the palm (for a better dexterity)
- Great balance between abrasion resistance, comfort and dexterity : ideal solution for those who often move from one task to another.
- Silicone free : no transfer of silicone contaminants to metal parts prior to painting

APPLICATIONS :

Handling and assembly tasks the following industries : Aerospace, motor industry, machinery and equipment, metal fabrication

RECOMMENDED STORAGE / APPLICATION :

- Keep out of direct sunlight, store in a cool and dry place and keep away from sources of ozone or ignition.
- Do not use against flames or temperatures $< -25^{\circ}\text{C}$ or $> 100^{\circ}\text{C}$. Do not use against chemicals : the gloves are not liquidproof. Do not use for heavy-duty mechanical applications.

STANDARDS :

In compliance with the EU 2016/425 regulation related to Personal Protective Equipment (category II) and in compliance with the following standards :

- General requirements : EN420:2003+A1:2009
- Mechanical risk : EN388:2016 (4131A)
- Thermal risk : EN407:2004 (X1XXXX)

In compliance with the august 5th 2020 regulation relative to materials and items in rubber in contact with foodstuffs and beverages - For dry products only



EN ISO 21420 :
2020 Cat.III



EN388:2016 + A1:
2018 - 4131A



EN 407 : 2020
X1XXXX

HyFlex® 11-840

FICHE D'INFORMATION SUR LA DURABILITÉ DES PRODUITS



ANSELL EARTH

Ansell Earth représente nos produits qui offrent des avantages environnementaux tout au long de leur cycle de vie.

Production

Fabriquée dans une usine :


- certifiée par Intertek pour avoir détourné >99% des déchets de la décharge
- dotée d'un système de gestion de l'environnement accrédité

Conditionnement

- La boîte en carton contient min. 45% de matériaux recyclés
- Taille des cartons optimisée pour une expédition efficace

Production

Fabriquée dans une usine :

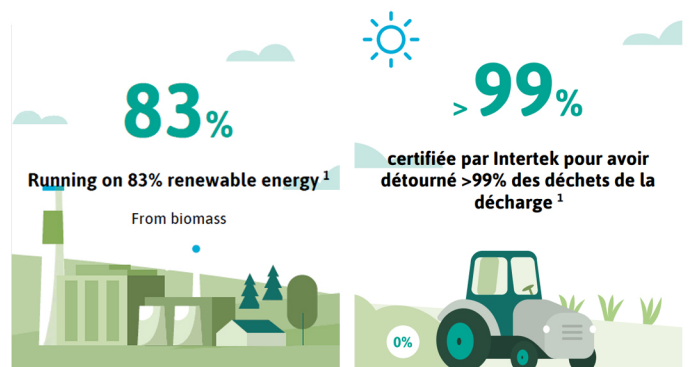

With accredited Environmental and Energy Management Systems³

Certified to ISO 14001:2015 and ISO 50001:2018 by SGS

Conditionnement




min. **45%**

La boîte en carton contient min. 45% de matériaux recyclés³

Taille des cartons optimisée pour une expédition efficace⁴

Total carbon footprint per pair: 0.527 kg CO₂e*

The graph below represents the carbon footprint breakdown of the product.

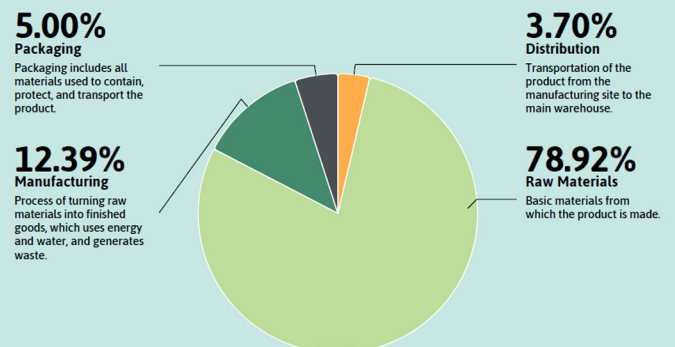

CARACTERISTIQUES ENVIRONNEMENTALES

Gant HYFLEX® 11840

Codes BOBET : 23707, 23708, 23709, 23710

Les impacts environnementaux de ce produit ont été analysés le long de son cycle de vie.



MATIERES PREMIERES


La boîte en carton contient minimum 45% de matériaux recyclés

FABRICATION



Fabriqué dans une usine :

- Certifiée par Intertek pour avoir détourné plus de 99% des déchets de la décharge
- Certification de la gestion de l'environnement et de l'énergie
- Fonctionne avec 83 % d'énergie renouvelable de la biomasse



EXPEDITION

Optimisation de la taille des caisses pour une expédition efficace



FIN DE VIE

Empreinte carbone totale par paire : 0.527 kg CO₂