



SPECIFICATIONS

ARTICLE

Designation : **Galvanized pallet truck**

Code bobet : **70958**

Selling Unit : **Unit**



Non-contractual pictures

CHARACTERISTICS

Hand pallet truck

- Rated capacity: 2500 kg (Q)
- Center of gravity: 600 mm (c)

WEIGHT:

- Unladen weight: 63 kg
- Axle load with load, rear: 1825 kg
- Axle load with load, front: 738 kg
- Axle load without load, rear: 21 kg
- Axle load without load, front: 42 kg

CHASSIS:

- Nylon wheels and rollers
- Wheel dimensions, front: D.200 x L.50
- Wheel dimensions, rear: D.82 x L.60

DIMENSIONS:

- Lifting height h3: 115 mm
- Tiller height in maximum driving position h14: 1185 mm
- Tiller height in minimum driving position h14: 710 mm
- Height from ground h13: 85 mm
- Total length l1: 1550 mm
- Fork carriage length l2: 400 mm
- Total width b1/b2: 525 mm
- Fork dimensions: 1150 x 150 mm
- Distance between fork arms b5: 525 mm
- Turning radius Wa: 1367 mm
- Lifting speed with and without load: 12 strokes

The GS EVO GALVANIZED hand pallet truck is specially designed for applications in humid or specific environments. Excellent corrosion resistance is guaranteed thanks to the hot-dip galvanizing process of the chassis and a GEOMET® surface coating for the tiller and other components.



HYDRAULIC PUMP:

The GS EVO GALVANIZED pump has been designed with a GEOMET® surface coating to provide maximum resistance


to moisture and oxidation. Extreme attention to detail has been paid to features such as:

- Monobloc hydraulic unit
- Chrome-plated piston rod and oil seal: to prevent rust and leaks during use
- Safety valve on the pump: to prevent overloading
- Proportional lowering valve via the tiller handle: the perfect tool for transporting fragile and delicate loads such as crystal, glass, and ceramics


Ergonomic 3D curved tiller. The two large side areas dedicated to hand positioning are specially designed to allow the operator to maintain a good position when transporting loads with maximum efficiency and to limit fatigue.

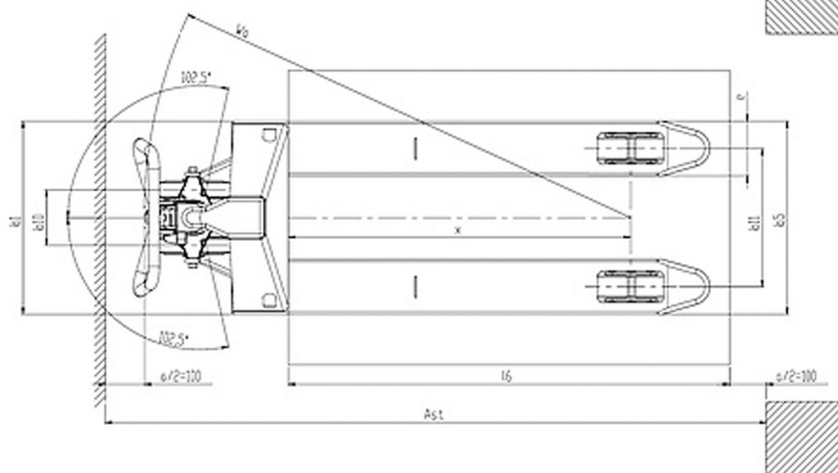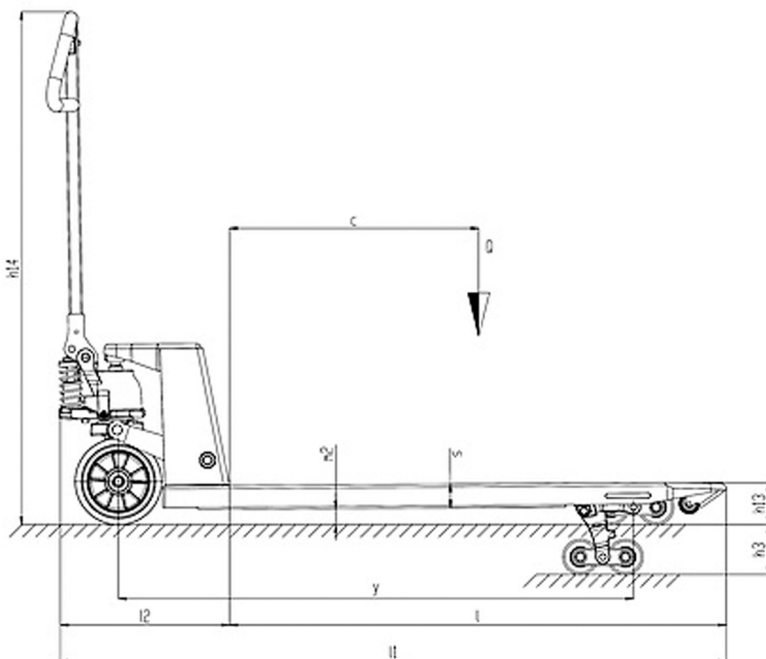

2500 kg



200 mm

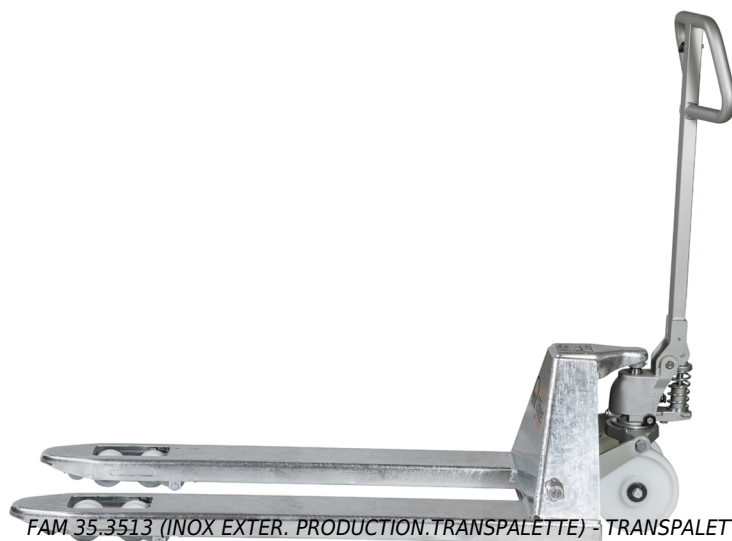


CARACTERISTIQUES ENVIRONNEMENTALES

Transpalette galvanisé

Code BOBET : 70958

Les impacts environnementaux de ce produit ont été analysés le long de son cycle de vie.

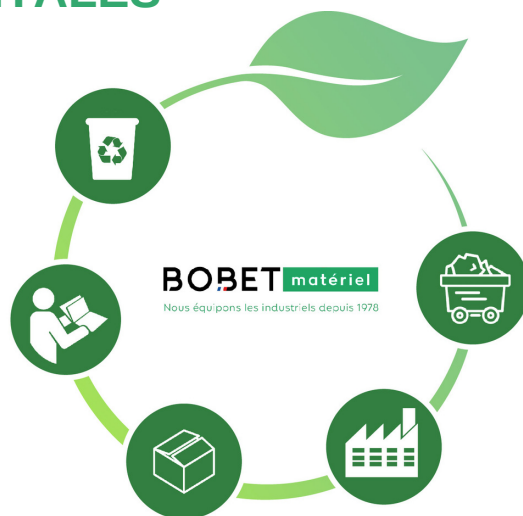

FABRICATION

- Fournisseur français
- Fabrication européenne

FIN DE VIE



- Acier recyclable