

SPECIFICATIONS

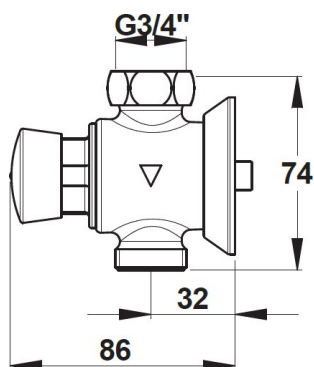
ARTICLE

Designation : **Presto temporized tap, wall-mounted**

Code bobet : **70090**

Selling Unit : **Unit**

Non-contractual pictures

**CHARACTERISTICS**

- Temporized tap 20-35 seconds
- Recommended pressure : 1 to 5 bars
- Flow : 30 l/mn at 1 bar
- Flow ring adjustment
- Anti water hammer
- In-line hydraulic supply
- Input/output : male G 3/4" (20x27)
- Resistant to temperatures of 75°C for 30 minutes in case of thermal shock
- Supplied with a flat seal and a fitting nut, a tube nut 16x18, a plate secured to the tap

STANDARDS :

- Brass body in compliance with the standards NF EN1982 / NF EN12164
- In compliance with EN12165 : Nickel-Chromium surface treatment according to NF EN12540, neutral salt spray resistance (NSS) : 200h according to NF ISO 9227