



SPECIFICATIONS



ARTICLE

Designation : **TOUCHNTUFF® 92600 nitrile glove**

Code bobet :

20527 : S.6-7

20528 : S.7-8

20529 : S.8-9

20530 : S.9-10

Selling Unit : **Hundred**

Non-contractual pictures



CHARACTERISTICS



Ansell Earth

- Powder-free nitrile glove, smooth grip surface, beaded cuff
- Length : 240 mm
- Thickness : 0.12 mm on the palm - 0.14 mm on the thumbs
- Colour : green
- Manufactured from nitrile, Touch N Tuff offers up to four times the puncture resistance of comparable natural-latex gloves, and three times the resistance of similar neoprene gloves
- It contains no natural rubber proteins, which means no risk of Type 1 allergies for the wearer. No evidence of risk from irritation or allergic contact dermatitis
- With a unique thin nitrile formulation it offers easy donning and strong grip in wet or dry conditions
- Glove highly versatile and suitable for many different uses
- Protection against chemicals and liquids
- AQL : 1.5 (EN374)

APPLICATIONS :

Food industries, chemical handling, laboratory analysis, pharmaceuticals, paint and spray shops, electronics, light assembly tasks, light assembly of oil-coated pieces, glass manufacturing, intricate parts handling...

PACKAGING :

100 gloves in a box

STANDARDS :

Complies with EU regulation 2016/425 relating to personal protective equipment (Category III)

Complies with European standards:

- General requirements: EN ISO 21420:2020
- Chemical risks: EN ISO 374-1:2016-Type B - JKPT
- Microorganism risks: EN ISO 374-5:2016 VIRUS
- Handling of pesticides: ISO 18889:2019

Complies with the decree of August 05, 2020, relating to rubber materials and objects in contact with foodstuffs, food products and drinks



0493



ISO 18889:2019

G1



EN ISO 21420 :

2020 Cat.III



EN ISO374-5:2016

VIRUS



EN ISO374-1:2016

Type B - JKPT

TouchNTuff® 92-600

FICHE D'INFORMATION SUR LA DURABILITÉ DES PRODUITS



ANSELL EARTH

Ansell Earth représente nos produits qui offrent des avantages environnementaux tout au long de leur cycle de vie.

Production

Fabriqué dans une usine :

- fonctionnant à 59% d'énergie renouvelable
- recyclant min. 14% d'eau pour réduire l'utilisation d'eau douce
- certifiée par Intertek pour avoir détourné >99% des déchets de la décharge
- dotée d'un système de gestion de l'environnement accrédité

Conditionnement

- Sans plastique
- Recyclable
- L'emballage contient min. 70% de matériaux recyclés

Production

Fabriqué dans une usine :



59%

fonctionnant à 59% d'énergie renouvelable ¹

De la biomasse



14%

recyclant min. 14% d'eau pour réduire l'utilisation d'eau douce ²

Grâce à la technologie de l'osmose inverse



>99%

certifiée par Intertek pour avoir détourné >99% des déchets de la décharge ³



dotée d'un système de gestion de l'environnement accrédité ⁴

Certifié ISO 14001:2015 par BSI



Conditionnement



Sans plastique ⁵



Recyclable ⁶



Total carbon footprint per pair: 0.068 kg CO₂e*

The graph below represents the carbon footprint breakdown of the product.

2.80%
Distribution

Transportation of the product from the manufacturing site to the main warehouse.

2.70%
Packaging


Packaging includes all materials used to contain, protect, and transport the product.

36.00%
Raw Materials

Basic materials from which the product is made.

58.50%
Manufacturing

Process of turning raw materials into finished goods, which uses energy and water, and generates waste.

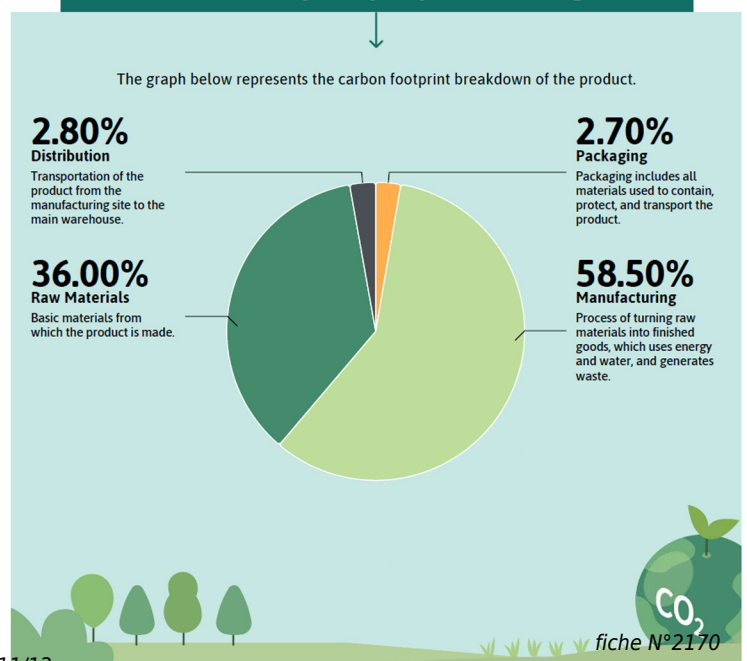


CARACTERISTIQUES ENVIRONNEMENTALES

Gant nitrile TOUCHNTUFF® 92600

Codes BOBET : 20527, 20528, 20529, 20530

Les impacts environnementaux de ce produit ont été analysés le long de son cycle de vie.

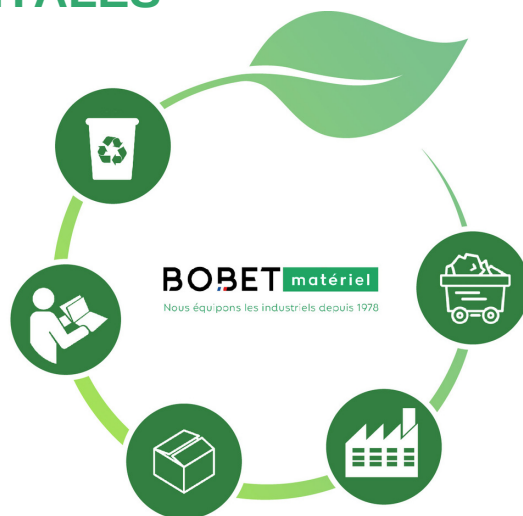

MATIERES PREMIERES

Emballage : sans matière plastique

FABRICATION



Fabriqué dans une usine :
Certifiée par Intertek pour avoir détourné plus de 99% des déchets de la décharge
Recyclant minimum 14% d'eau pour réduire l'utilisation d'eau douce
Fonctionnant à 59% d'énergie renouvelable
Certification de la gestion de l'environnement et de l'énergie



FIN DE VIE

Emballage : recyclable

Empreinte carbone totale par paire : 0,068 kg CO₂e