



SPECIFICATIONS



ARTICLE

Designation : **WILCOFLEX 0 stainless steel glove**

Code bobet : *See table below*


Selling Unit : **Unit**



Non-contractual pictures

Code	Description	Code	Description	Code	Description
26820	T. 5, XXS, left	26824	T. 9, L, left	26812	T. 7, S, right
26821	T. 6, XS, left	26825	T. 10, XL, left	26813	T. 8, M, right
26822	T. 7, S, left	26810	T. 5, XXS, right	26814	T. 9, L, right
26823	T. 8, M, left	26811	T. 6, XS, right	26815	T. 10, XL, right

CHARACTERISTICS



MATERIAL : food contact stainless steel wire and food contact stainless steel patented spring.

Chainmail :

- * wire diameter : 0,5 mm
- * ring internal diameter : 3 mm
- * ring external diameter : 4 mm

Wrist fastening with stainless steel spring protected by mesh

Integrated tensioners for self-adjusted chainmail

Left-handed glove or right-handed glove

Size of the glove identified by a colour tag

SIZES

N° 0 - brown XXS 5-5½

N° 1 - green XS 6-6½

N° 2 - white S 7-7½

N° 3 - red M 8-8½

N° 4 - blue L 9-9½

N° 5 - yellow XL 10

APPLICATIONS :

The WILCOFLEX glove provides protection against stabbing when :

- working in slaughter houses, in meat, fish or shellfish industries
- working in catering establishments
- doing manual boning operations for processing meat, game and poultry
- working in plastics, leather, textile and paper industries
- laying floor coverings and similar works

WASH :

Cleaning / Disinfection: PPE can be cleaned using a suitable washing gun, by soaking, by vigorous brushing or in a washing machine. In all cases, the water with added product must be at a maximum temperature of 63 ° C. Warning : the technical sheet of the product used refers to a maximum water temperature, which may be lower. Particular attention to dosage and temperature must be observed in the case of using alkaline chlorinated or acidic products. Use only products authorized by the veterinary services. The use of chlorine in large doses and at high temperature is not recommended.

Disinfection: High temperature disinfection can be done with clean water of a minimum of 82 ° C up to a maximum temperature of 90 ° C, in a machine, by soaking or sprinkling.

Drying and Storage: Forced drying by hot or natural air ventilation but in a dry and ventilated place. Store in a cool, dry place

STANDARDS :


This glove complies with the regulation (UE) PPE 2016/425.

NF EN 1082-1 & ISO 13999-1: Protective clothing. Gloves and armguards protecting against cuts and stabs from hand knives.

NF EN 14328: Protective clothing. Gloves and armguards protecting against cuts from powered knives. Requirements and test methods

Stainless steel in compliance with the decree of January 13, 1976 relating to stainless steel materials and objects in contact with foodstuffs and with NF EN 1811 + A1 regulation «Reference test method for release of nickel from products intended to come into direct and prolonged contact with the skin».

Glove in accordance with article 33 of REACH regulation (Registration, Evaluation, Authorisation and Restriction of Chemicals) N°1907/2006 - 18 december 2006 and its amendments.

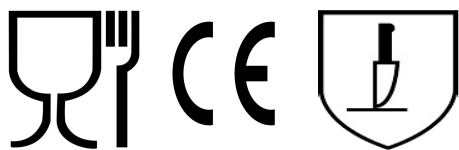

CARACTERISTIQUES ENVIRONNEMENTALES

Gant inox WILCOFLEX 0

Codes BOBET : 26812, 26813, 26815, 26821, 26814, 26820, 26810, 26811, 26824, 26822, 26823, 26825

Les impacts environnementaux de ce produit ont été analysés le long de son cycle de vie.



FABRICATION

- Fabrication française
- Fournisseur français

FIN DE VIE



- Inox recyclable